

8783

ImagePro 8783 Portable LCD Projector



*The ImagePro 8783 is a light
(3.9 lbs), easy-to-install portable projector
ideal for classroom or conference room.*

8783 FEATURES

- 2000 Lumens Brightness
- WXGA Resolution (1280 X 800)
- 3 Polysilicon Active-Matrix LCDS
- Native 16:10 Aspect Ratio
- HDTV ready with HDMI Input
- Security Transition Detector
- Vertical Keystone correction $\pm 30^\circ$
- Easy to transport, only 3.9 lbs.
- Remote mouse control
- Blackboard and Whiteboard mode



**New wide computer format of 16:10 for images
Precisely matches image on your computer screen.
Comes with carrying case, remote and accessories.**

THE ALL NEW
DUKANE
Education. Presentation. Inspiration.
www.dukcorp.com




ConVA by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with ConVA. Visit www.convasystems.com.
Call Dukane: 800-676-2485

ImagePro 8783

Portable LCD projector

Back Panel

Connections

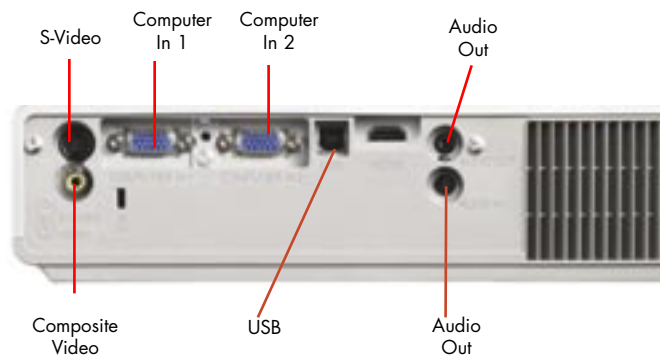

Key features:

- WXGA (1024 x 800) resolution
- 2000 lumen brightness
- 3 Polysilicon Active-Matrix LCDs
- Wide angle lens
- HDTV ready, HDMI input
- PIN Security Transition Detector
- Vertical keystone correction +/- 30°
- Easy to transport, only 3.9 lbs.
- Monitor loopthrough
- Remote mouse control
- Blackboard and whiteboard mode
- Five Year Warranty and One Year Peace of Mind Service

8783 Projection Table

Image Size 16:10		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	25	3.1	3.7
60	51	6.2	7.5
80	68	8.3	10.1
100	85	10.5	12.6
120	102	12.6	15.2
150	127	15.7	19.0
200	170	21.1	25.3
300	254	31.6	38.0

Throw Ratio (distance to width), 1.5 1.8

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
800-676-2485
630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av

ImagePro is a registered trademark of Dukane Corporation
#11700-L-06

toll-free
fax
e-mail



Specifications

Image Element	0.59" polysilicon active-matrix TFT x3
Brightness	2000 ANSI lumens (1600 lumens in Whisper Mode)
Resolution	1280 x 800 pixels (H X V), WXGA
Contrast	500:1
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Manual zoom (F1.7 - 1.9), 1.2X
Lens Throw Ratio	1.5 -1.8:1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg
Aspect Ratio	4:3, 16:10 native
Computer	VGA, SVGA, XGA, SXGA, SXGA+, UXGA, WXGA
Compatibility	Compressed PC and MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N,
Component Video, Image Control	HDTV (1080i, 720p, 576i, 480i) Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	190W UHB
Lamp Life	2000 hours (typical) 3000 hours (whisper mode)
Audio	1 speaker 1 watt
Throw Distance	37" to 368"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, Shared on 15 pin D-Sub (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Audio	(1) Stereo mini jack
Outputs, Audio	(1) Stereo mini jack
Digital Input	(1) HDMI
Outputs, Control	USB Mouse control
Security	Kensington lock slot
Fan Level	35dB, ultra quiet 29dB in Whisper Mode
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 310 watt
Size (WxHxD)	10.8" x 2.3" x 8.1"
Weight	3.9 lbs.
Shipping Weight	14 lbs.
Carton Size	16" x 14" x 12"
Accessories Included	Remote control, batteries, power cord, RGB cable, RCA video cable, manual and soft carry case.
Safety	UL/C-UL, FCC Class B, CE
Optional Accessories	Lamp 456-8783 Ceiling Mount, Universal; RPA-U Filter, MUO3602

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR